


High Performance Cutting Solution





High Precision Paper Cutters

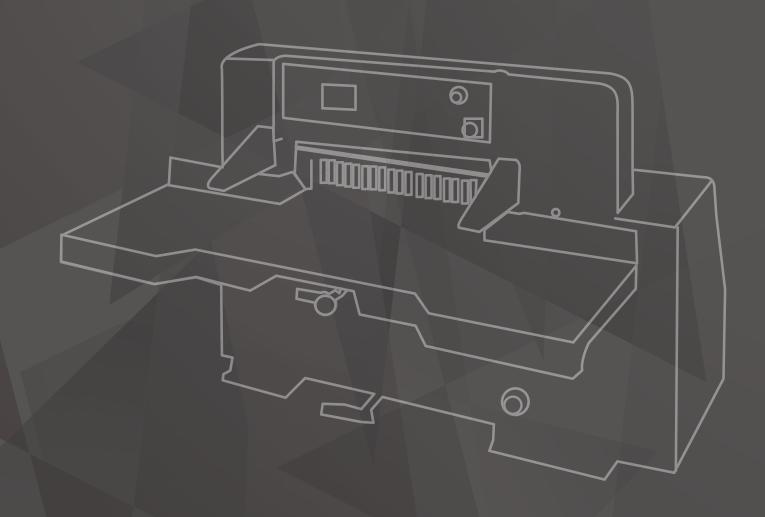

The Digicut high quality paper cutters are more user friendly and come with a display panel of 7.0 inch with a flexibility of offering the color adjustment to the user. These cutters have high quality colors (25600) and their storage can reach up to 30, 30 and 170 groups respectively. Every group has 105, 105 and 250 cuts respectively, where its storage time can reach 300, 00 hours. They have multi-language operating interface and have luminous short key so as to ensure the high stability. The Digicut paper cutters are equipped with adjustable-pressure single-hydraulic clamp system (paper press by the hydraumatic). Two valves are already combined from German ISO approved hydraulic units.

| Model | MT-92SHDR | MT-92SHSR | MT-92SSDR |
|---|--|--|--|
| | Single Hydraulic Double Rail System | Single Hydraulic Single Rail System | Single Hydraulic Servo Double Rail System |
| Cutting width(mm) | 920 | 920 | 920 |
| Max.cutting height(mm) (Without auxiliary panel) | 120 | 120 | 120 |
| Max.cutting length(mm) | 920 | 920 | 920 |
| Main motor power(kw) | 3 | 3 | 3 |
| Net weight(kg) | 2200 | 2200 | - |
| Width with sideway(mm) | 2120 | 2120 | 2120 |
| Without sideway(mm) | 1980 | 1980 | 1980 |
| Machine length | 2050 | 2050 | - |
| Machine height | 1560 | 1560 | - |
| Front table length(mm) | 690 | 690 | 690 |
| Table height(mm) | 900 | 900 | 900 |
| Clamp pressure min(dan/bs) | 150 | 150 | 150 |
| Max. clamp pressure | 35KN | 35KN | 35KN |
| Min. clamp pressure | 1.5KN | 1.5KN | 1.5KN |
| Knife thickness(mm) | 12.7 | 12.7 | 12.7 |
| Grinding reserve(mm) | 30 | 30 | 30 |
| Without false clamp(mm) | 25 | 25 | - |
| With false clamp(mm) | 90 | 90 | - |
| Cutting speed(mm) | 45 | 45 | 45 |
| Voltage(three-phase)(v) | 440 V | 440 V | 440 V |
| Packing size(L*W*H)(mm) | 2320*1420*1850 | 2320*1420*1850 | 2320 x 1420 x 1850 |

High Precision Paper Cutters



The Digicut high quality paper cutters are more user friendly and come with a display panel of 10 inch with a flexibility of offering the color adjustment to the user. These cutters have high quality colors (25600) and their storage can reach up 170 groups respectively. Every group has 250 cuts respectively, where its storage time can reach 300, 00 hours. They have multi-language operating interface and have luminous short key so as to ensure the high stability. The Digicut paper cutters are equipped with adjustable-pressure single-hydraulic clamp system (paper press by the hydraumatic). Two valves are already combined from German ISO approved hydraulic units and gear pumps from Italy.

The apparatus controlled system:

- 1. Adopts Switzerland ABB, German MULLER, Japan OMRON
- 2. Servo motor is from Japan YASKAWA
- 3. Air pump is from TAIWAN HOUBANG

| Model | MT-115D | MT-115S |
|---|----------------|----------------|
| Cutting width(mm) | 1150 | 1150 |
| Max.cutting height(mm) (Without auxiliary panel) | 165 | 165 |
| Max.cutting length(mm) | 1150 | 1150 |
| Main motor power(kw) | 4 | 4 |
| Net weight(kg) | 3800 | 3800 |
| Width with sideway(mm) | 2650 | 2650 |
| Without sideway(mm) | 2365 | 2365 |
| Machine length | 2465 | 2465 |
| Machine height | 1650 | 1650 |
| Front table length(mm) | 735 | 735 |
| Table height(mm) | 900 | 900 |
| Clamp pressure min(dan/bs) | 150 | 150 |
| Max. clamp pressure | 35KN | 35KN |
| Min. clamp pressure | 1.5KN | 1.5KN |
| Knife thickness(mm) | 13.75 | 13.75 |
| Grinding reserve(mm) | 60 | 60 |
| Without false clamp(mm) | 25 | 25 |
| With false clamp(mm) | 95 | 95 |
| Cutting speed(mm) | 45 | 45 |
| Voltage(three-phase)(v) | 440 V | 440 V |
| Packing size(L*W*H)(mm) | 2650*1500*2000 | 2650*1500*2000 |

THE PAPER BACKGAUGE CONTROLLED SYSTEM:

1. Roller ball lead screw: ABBA 2. Double rail guide way: ABBA

THE SAFETY PROTECTED SYSTEM:

- 1. Extensible and precise infrared protective device Control which is CE standard.
- 2. Blade-Replacement Device with safety and convenience.
- 3. Air cushion and chromeplating platform of photoelectricity protective device.
- 4. Underlay cutter frame.
- 5. The closed paper pusher frame.
- 6. Machine lock, safety bolting, the safety button and light grid.
- 7. The driving cutting part uses worm.

THE ACCESSORY WITH MACHINE:

- 4. 2 Knife, One in Machine and another one 1. Tool box: 1 set
- 2. Manual book 5. 5 Cutting sticks
- 3. Operational CD

WINNING Edge Solutions

for your Printing and Packaging business needs.



1011

▶ Labels & Packaging



High-end Digital Printing



▶ Wide Format Systems







Engineering Systems

experience

månpower base

Regd. & Corporate Office

MONOTECH SYSTEMS LIMITED

III Floor, City Centre, No. 66, Thirumalai Road, T. Nagar, Chennai - 600 017, INDIA Phone +91 44 2815 7928 / 7894 / 7933, Fax +91 44 2815 7973

Toll Free (India): 1-800-102-4567 | Email: info@monotech.in | Web: www.monotech.in



monotechsystems



monotechsystems



monotechsystem

