

TZ-5300

imageprograf **TZ** Series

TZ-5300 MFP Z36

LUCIA

•5pl Ink droplet size

100

op Delivery Tray

109.22 m

Colour LCI

💮 auto

Estimation of Remaining Media

L-COA PRO

0

Dual Roll Systen

Connectivit

h AUTO

Auto Media Detectior

 $\Box \Box$ 

`\_\_\_\_

FINE

T

Line Accuracy: /- 0.1% or les

Auto Media Loadii

500 дв

Encryted HDD

•

# SURPASS EVERY EXPECTATION with High Print Speed

colour pigment ink

The new Canon imagePROGRAF TZ series pushes the boundaries of productivity by offering high-speed printing, revolutionary media handling capabilities and advanced security features in a new console body chassis. Complete with seamless production workflow and all new MFP solution, the TZ series is designed to meet the demand of production Computer Aided Design (CAD) and Geographical Information Systems (GIS) markets.

## **BEST IN CLASS PRINT PERFORMANCE**

The new TZ series features industry-leading quick first print performance of just 19 seconds, and quick return from sleep in 32 seconds. With the adoption of twin carriage motors driving print head scanning, the TZ series is able to push print speed up to 4 pages per minute for A1 printouts, meeting the on-demand and higher print frequency requirements in the production CAD and GIS markets.

## **EXCELLENT PRINT QUALITY**

The TZ series employs L-COA PRO processing engine and FINE print head technology, delivering outstanding print quality and accuracy at high speed. Non-firing nozzles detection will automatically compensate for nozzle blockage, ensuring best quality on every print. The LUCIA TD 5-colour all pigment ink is developed to produce fine lines and sharp text with minimal feathering. The ink was formulated to provide vibrant colours, dense black, excellent colour fastness and great weather resistance with water resistant media.



### **VIRTUALLY NO PRINTING LIMITS**

**Borderless printing** is available on standard and custom sizes for all supported media. With additional feature such as three-sided edge-to-edge printing, the TZ series can handle any poster printing task with ease.



#### EXCEPTIONAL LEVELS OF PRODUCTIVITY

A Canon's first, the all-new console body chassis comes with **Dual Roll** that supports continuous printing and hot-swapping of roll paper. This allows a depleted second roll to be replaced even while printing, reducing time spent for paper replenishment and setup. The **Top Delivery Tray** can hold up to 100 sheets of AO-size plain paper, while longer, heavier media can be delivered to the front basket. **Hot-Swap Ink Tanks** allow empty tanks to be replaced on-the-fly without having to stop the printer.



Top Delivery Tray

Hot-Swap Ink Tanks



Hot-Swap Roll Replacement

#### INDUSTRY LEADING MEDIA HANDLING CAPABILITY

Paper loading process could not be any more convenient all that is needed is for a user to load a paper roll from the front, and the printer assumes total responsibility for paper loading and detection of media type, length, and width. Highly visual LED indicators on the printer body also serve to inform remaining roll paper while minimising user interaction with the operation panel and improving supplies management in the process. Remaining roll amount is displayed on operation panel and alert will be sent out when media is not sufficient to complete the print job.



## **PROTECT YOUR PRINT ENVIRONMENT**

The TZ series complies with the Advanced Encryption Standard (256-bit) established by the U.S. National Institute of Standards and Technology (NIST).




## **MANAGING YOUR PRINT JOBS HAS NEVER BEEN EASIER**

Canon software applications are designed specifically to keep each print job on track and improve your workflow and productivity.

#### **DIRECT PRINT PLUS**

The newly developed print job submission tool makes workflow simpler and more efficient with features including shortcut printing, batch printing of multiple files, nesting and print job progress monitoring.

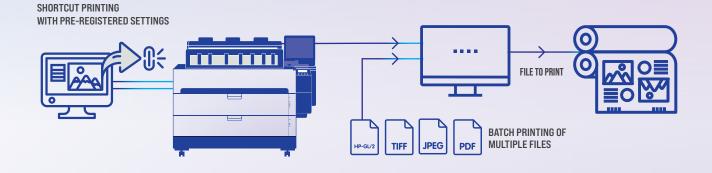

## CPP DRIVER SELECT & PUBLISHER SELECT



The TZ series enable a smoother workflow

integration and management for existing Canon Production Printing (CPP) users with support of CPP Driver Select and Publisher Select.

#### **FREE LAYOUT PLUS**

Free Layout plus, a print utility that allows users to tile, nest and create custom layouts before printing.



#### **ACCOUNTING MANAGER**

Accounting Manager is ideal for businesses looking to track printing costs based on the cost of media and ink.



#### **DEVICE MANAGEMENT CONSOLE**

**Device Management Console effectively** 



manages multiple printers, monitoring activities such as error messages and printer

information like ink status and status of calibrations.

#### **POSTERARTIST LITE**

Canon's PosterArtist Lite software lets you design and print professional looking posters with over 1300 templates,



photos and clipart to suit a wide variety of business environments. Creating head turning posters or signs has never been easier.

#### CANON PRINT INKJET/SELPHY

The Canon PRINT Inkjet/SELPHY app connects your mobile device wirelessly

to the TZ series to print, scan and copy. It also works as a portal to manage your printer settings and monitor your printer status for a seamless printing experience.

#### MEDIA CONFIGURATION TOOL

Simplifies media management for Canon and third party media, allowing you

to customise media in both the driver and printer for optimum print result.

#### imageRUNNER ADVANCE DIRECT ENLARGEMENT COPY



Scan-to-Print using an imageRUNNER to scan images and print directly from the TZ series printers.



on med

## imagePROGRAF MFP SOLUTION

The new TZ series MFP solution provides maximum performance in scanning and copying with speed and precision while maintaining minimal footprint.

#### **ALL NEW COMPACT DESIGN**

The new Z36 scanner is designed from the ground up to better integrate with the new TZ series printers. Lightweight and compact, this small footprint scanner is perfect for any office environment.

## PARALLEL PROCESSING OF SCANNING AND PRINTING

Parallel processing significantly improves productivity and efficiency by performing print and scan operation simultaneously.

#### **NEW SYSTEM CONTROLLER**

The large 396.24mm (15.6in) touchscreen panel system controller makes it easy to perform print settings and preview before printing. Printer information such as media and ink status can be easily accessed via the system controller. Its embedded OS adds a layer of reliability and stability to the performance of the system controller.

#### SINGLE SENSOR, DUAL LED TECHNOLOGY

Single sensor covers the full width to ensure the finest text are reproduced without misalignment. Bi-directional illumination from dual LED reduces shadowing at creases or folds, ensuring high quality scanned image.

#### **DIVERSE MEDIA SUPPORT**

Front entry - rewind to front path makes it convenient for regular scanning of plain paper document, while the straight-through paper path accepts scan documents up to 1 mm in thickness.

#### SMART WORKS MFP V6 WITH ABUNDANT FEATRUES

The new SmartWorks MFP scanning software simplifies large format scanning and copying with intuitive user interface and abundant of image enhancement features such as de-skew, white point, colour reversal of diazo print and restoration of deteriorated original images, which is useful for archiving old drawings.



## **SPECIFICATIONS**

PRINTER		TZ-5300
		5-Colour 914.4mm (36in)
Printer Type		15 360 nozzles (MBK: 5 120 nozzles; BK, C, M, Y: 2 560 nozzles each)
Number of Nozzles		
Max. Print Resolution		2 400 × 1200 dpi
Nozzle Pitch		1 200 dpi (2 lines)
Line Accuracy *1		± 0.1% or less
Min. Ink Droplet Size		5 pl
Ink Capacity	Sales Ink Bundled Starter Ink	330 ml / 700 ml (MBK, BK, C, M, Y) 330 ml (MBK) / 160 ml (BK, C, M, Y)
Ink Type	Dulluleu Starter liik	Pigment ink
Ink Type Printer Languages		SG Raster (Swift Graphic Raster), HP-GL/2, HP RTL, PDF (Ver. 1.7), JPEG (Ver. JFIF1.02)
Printer Languages		Apple AirPrint, Direct Print Plus, Direct Print & Share, CPP Driver Select & Publisher Select, AutoCAD Optimized Printer Driver, Easy-PhotoPrint Editor,
Print Solutions		Canon PRINT Inkjet/SELPHY, Canon Print Service, Free Layout plus, PosterArtist Lite, imageRUNNER ADVANCE Direct Enlargement Copy
Management Solutions		Media Configuration Tool, Accounting Manager, Device Management Console, Quick Utility Box
	Standard	Hi-Speed USB, Full Speed (12 Mbit/second), Hi-Speed (480 Mbit/second), Bulk transfer, Series B (4 pins),
Interface (Built-in)	Standard	USB Memory (Direct Print)
	Network	IEEE 802.3 10base-T, IEEE 802.3u 100base-TX/Auto-Negotiation, IEEE 802.3ab 1000base-T/Auto-Negotiation,
		IEEE 802.3x Full Duplex, SNMP, HTTP, TCP/IP (IPv4/IPv6)
	Wireless LAN	IEEE802.11 b/g/n, WEP (64/128bit), WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/AES)
Memory		Standard: 128 GB (Physical: 2 GB)
Hard Disk		500 GB (Encrypted)
PRINT SPEED *2 (AO SIZE)		
Plain Paper	CAD Drawing	26 second [Fast (Custom Q5)] 35 second [Fast]
	SAD Drawniy	1 minute 6 second [Standard]
		29 second [Fast (Custom Q5)]
	Poster	41 second [Fast]
		1 minute 15 second [Standard]
Heavyweight Coated Paper HG	Poster	2 minute 34 second [Standard]
Glossy Paper HG 170	Poster	5 minute 15 second [Standard]
MEDIA HANDLING	100001	
Media Width	Roll Paper / Cut Sheet	203.2 ~ 917 mm
Media Thickness	Roll Paper / Cut Sheet	0.07~0.8 mm
Min. Printable Length Max. Printable Length	Roll Paper	Front Output: 203.2 mm, Top Output: 205 mm
	Cut Sheet	203.2 mm
	Roll Paper	18 m <sup>13</sup>
	Cut Sheet	610 mm
Max. Roll Outer Diameter	[	175 mm or less
Media Feed and Output Method	Roll Paper	Dual Roll, Front Load, Top Output / Front Output'4
Borderless Printing	Cut Sheet	Front Load, Front Output" <sup>5</sup>
(Roll Paper only, standard & custom sizes)	Printable Media Width	203.2 ~ 917 mm
	Recommended Area	Roll Paper - Top: 20 mm, Bottom: 3 mm, Side: 3 mm Cut Sheet - Top: 20 mm, Bottom: 31 mm, Side: 3 mm (Apple AirPrint) Cut Sheet - Top: 20 mm, Bottom: 20 mm, Side: 3 mm (Others)
Margins		Roll Paper - Top: 3 mm, Bottom: 3 mm, Side: 3 mm
	Printable Area	Roll Paper - Top: 0 mm, Bottom: 0 mm, Side: 0 mm (Borderless Print) Cut Sheet - Top: 3 mm, Bottom: 12.7 mm, Side: 3 mm (Apple AirPrint) Cut Sheet - Top: 3 mm, Bottom: 20 mm, Side: 3 mm (Others)
DIMENSIONS & WEIGHT *6	<u>.</u>	
Packaged Dimensions (W x D x H)	Main Unit + Top	1704 x 946 x 1373 mm
Weight	Delivery Tray*7 + Pallet	274 kg
Dimensions (W x D x H) Weight	Main Unit	1548 x 762 x 1126 mm (Basket Closed) 206 kg
	Main Unit +	1 548 x 960 x 1 189 mm (Basket Closed)
	Top Delivery Tray*7	1548 x 1293 x 1189 mm (Basket Open)
		207 kg
POWER AND OPERATING REQUIREMENTS Power Supply		AC 100 - 240 V, 50 - 60 Hz
	Operation	AC 100 - 240 V, 50 - 60 HZ 157 W or less
Power Consumption	Sleep Mode	2.0 W or less
	Sieep Mode Power OFF	2.0 W or less 0.3 W or less
Operational Environment		
	Temperature	15 - 30 °C
	Humidity	10 - 80 % RH (no dew condensation)
Acoustic	Power*8	Operation: Approx. 70 dB
	Pressure *8	Operation: Approx. 52 dB (A) Standby: 35 dB (A) or less
OPTIONS		Standuy, 35 UD (A) UT IESS
2" / 3" Roll Holder		RH2-34
CONSUMABLES		
Ink Tank		PFI-8340 (330 ml) / PFI-8740 (700 ml)
Print Head		PF-06
Maintenance Cartridge		MC-30
mantenance ou triuge		

\*1 User adjustments are required. Printing environment and media must match those used for the adjustments. Paper required: Plain paper, CAD tracing paper, coated paper, CAD translucent matte film only.
 \*2 Time taken to print one page does not include time required for data processing, data transfer and pre-printing operations.

\*3 Varies according to the OS and application.

\*4 Media dependant. Print will be delivered face-down for top output, face-up for front output.

\*5 For cut sheet, manual feed using media locking lever.

 $^{*}6 \quad \ \ {\rm Include\ roll\ holder\ set,\ exclude\ ink\ and\ print\ head.}$ 

\*7 Top delivery tray consists of paper output support and top output guide.

\*8 Measured using ISO 7779 standard by using 914.4mm (36in) Standard Plain Paper 2, standard mode and line drawing / text mode.

#### imageprograf **TZ** Series



Cano

SCANNER\* Z36 Scan Width 914 mm (36in) Min. Scan Width 150 mm (6in) JPEG / PDF 8 m Max. Scan Length TIFF 15.2 m 200 dpi: 152.4 mm/second 24-bit Colour 300 dpi: 101.6 mm/second 600 dpi: 50.8 mm/second Max. Copy Speed (mm/second) \*10 200 dpi: 330.2 mm/second 300 dpi: 218.44 mm/second 8-bit Greyscale & Monochrome 600 dpi: 109.22 mm/second 200 dpi: 76.2 mm/second 24-bit Colour 300 dpi: 50.8 mm/second 600 dpi: 50.8 mm/second Max. Scan Speed (mm/second) \*10 200 dpi: 330.2 mm/second 8-bit Greyscale & Monochrome 300 dpi: 218.44 mm/second 600 dpi: 109.22 mm/second **Optical Resolution** 1200 dpi Document Handling \*1 Front Load, Rear Output Max. Document Thickness \*12 1mm **Operating System** Windows 10 Enterprise LTSC 64 bit Processor Intel Core i3-8100T Hard Disk 256 GB (Solid State Drive) System Controller Memory 8 GB (DDR 4) 396.24 mm (15.6in) multi-touch colour display Display Software Included SmartWorks MFP V6 PDF, Multipage PDF, JPEG, TIFF, DWF Scan Format Dimensions (W x D x H)  $^{\ast_{13}}$ 1 056 x 251 x 156 mm Scanner 7.8 kg Weight System Controller 2.5 kg Operation 22.7 W (Colour) / 23.3 W (Greyscale) Power Consumption (Scanner) Sleep Mode 0.2 W 12.4 W Standby 52.2 W Operation Power Consumption (System Controller) Sleep Mode 17W 7.9 W Standby

\*9 Scanner is manufactured by U.K. - based Global Scanning UK Ltd. Scanner is supplied with TZ-5300 MFP Z36.

\*10 The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times and quoted top speeds will depend on the host performance and are not guaranteed for all media types. Scan times quoted are the maximum for true 200 x 200 dpi image capture.

\*11 Thicker documents must be flexible and the document return guides removed and may require additional support. Some media should be scanned at reduced speeds. It is not possible to guarantee to be able to scan all media types and sizes.

\*12 To return document to the front, use document return guides

\*13 Document return guides and paper tray folded.

\*14 Power consumption is measured with scan resolution setting of 200 dpi.

#### Tel: 0124-4160000 | Call: 1800 208 3366 | 1860 180 3366 7<sup>th</sup> Floor, Tower B, Building No. 5, DLF Epitome, DLF CANON INDIA PVT. LTD. Phase III, Gurugram - 122002 Bengaluru Kolkata Mumbai Hyderabad Chennai Pune Canon India Pvt. Ltd. 3A R.O. 6<sup>th</sup> Floor, 4<sup>th</sup> & 5<sup>th</sup> Floor, Natraj by "SKCL" Infinite Towers, 3rd Floor, Salarpuria The Belvedere Office No.: 404 8 405. H.No.: 6-3-891/892, Windsor Building, 4A. Abanindranath 8th Floor, Plot No.: A218 A22. **Bustomiee 194**, Junction of Senapati Bapat Road No. 3, Ulsoor Road, Sarani (Camac Street). Western Express Highway & 2nd Floor, Raj Bhawan Road, Thiru-Vi-Ka Industrial (Bhamburda), Shivaii Bengaluru - 560042 Kolkata - 700017 Estate, Guindy, Nagar, Pune - 411 016 Andheri Kurla Road. Somaiiquda. Tel: 080-40079410 Tel: 033-40110700 Hyderabad - 500082 Chennai - 600032 Tel: 020-6680 9600 Andheri East.

Tel: 040-39995800

Fax: 040-39995801

Tel: 044-49080000

Fax: 044-49080001

Fax: 020-66809602

Canon India Complies with E-Waste (Management) Rules, 2016

Fax: 033-40110731

Please return end-of-life product for environmentally safe disposal. For details, visit https://in.canon

Illustrations and specifications do not necessarily apply to products and services offered in each local market. Technical specifications are subject to change without prior notice.

This document is for information purpose only. The contents are subject to change without notice. Product options, name and availability may vary by regions. We expressly disclaim any liability or contractual obligations with respect to this document. Brands and product names are trademarks and/or registered trademarks of their respective owners.

Warnings: Unauthorized recording of copyrighted materials may infringe the rights of copyright owners and be contrary to copyright laws.

Mumbai - 400069

Tel: 022-67145000